
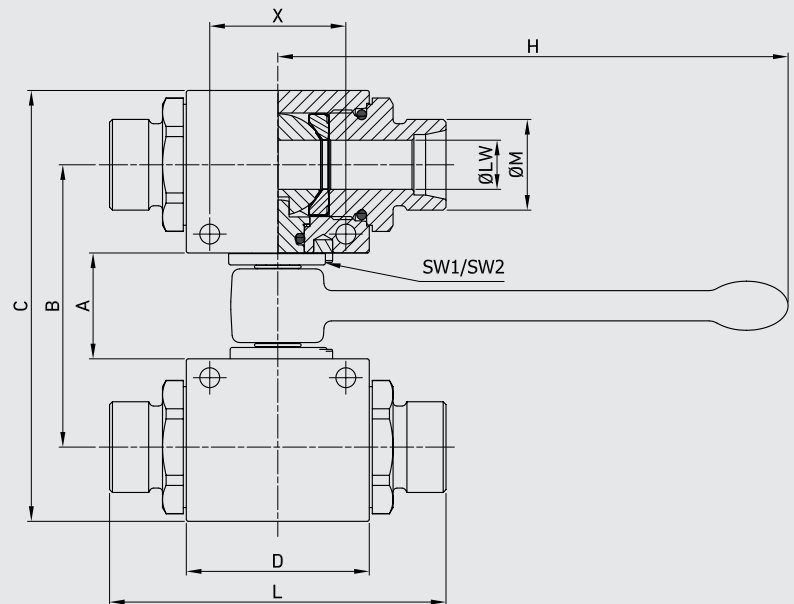


TANDEM

HYDRAULIC BALL VALVES

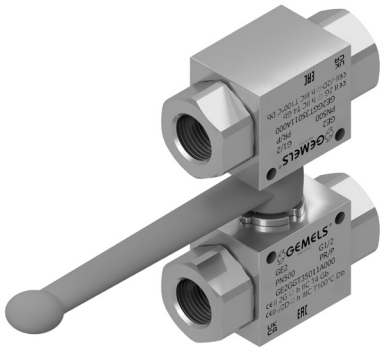

TANDEM COMBINATION VALVES DIN/ISO 228 BSP

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 TANDEM COMBINATION VALVES G1/4	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	71	135	34	6	9	kg 0,98	G1/4
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES G3/8	DN10	MPa 500	mm	28,5	67,6	97,6	44,4	73	135	34	10	9	kg 1,2	G3/8
		Psi 7250	inch	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES G1/2	DN13	MPa 500	mm	28,5	74,7	114	48,8	83	135	36	13	9	kg 1,4	G1/2
		Psi 7250	inch	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES G3/4	DN20	MPa 420	mm	37	94	151	62,5	95	213	50	20	14	kg 2,5	G3/4
		Psi 6090	inch	1,46	3,70	5,94	2,46	3,74	8,39	1,97	0,79	0,55	lb 5,51	
GE2 TANDEM COMBINATION VALVES G1	DN25	MPa 420	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,8	G1
		Psi 6090	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES G1 1/4 R	DN25	MPa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,8	G11/4
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES G1 1/2R	DN25	MPa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,8	G1 1/2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	

TANDEM COMBINATION VALVES ANSI/ASME B1.20.1 NPT

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 TANDEM COMBINATION VALVES N1/4	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	71	135	34	6	9	kg 0,98	N1/4
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES N3/8	DN10	MPa 500	mm	28,5	67,6	97,6	44,4	73	135	34	10	9	kg 1,2	N3/8
		Psi 7250	inch	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES N1/2	DN13	Mpa 500	mm	28,5	74,7	114	48,8	83	135	36	13	9	kg 1,40	N1/2
		Psi 7250	inch	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES N 3/4	DN20	Mpa 420	mm	37	94	151	62,5	95	213	36	20	14	kg 2,50	N3/4
		Psi 6090	inch	1,46	3,70	5,94	2,46	3,74	8,39	1,42	0,79	0,55	lb 5,51	
GE2 TANDEM COMBINATION VALVES N1	DN25	Mpa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	N1
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES N1 1/4R	DN25	Mpa350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	N1 1/4
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES N1 1/2R	DN25	Mpa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	N1 1/2
		Psi5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	

TANDEM COMBINATION VALVES SAE J1926-1

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 TANDEM COMBINATION VALVES SAE4	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	71	135	34	6	9	kg 0,98	7/16 UNF
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES SAE6	DN10	MPa 500	mm	28,5	67,6	97,6	44,4	73	135	34	10	9	kg 1,2	9/16 UNF
		Psi 7250	inch	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES SAE8	DN13	Mpa 500	mm	28,5	74,7	114	48,8	83	135	36	13	9	kg 1,4	3/4 UNF
		Psi 7250	inch	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES SAE12	DN20	Mpa 420	mm	37	94	151	62,5	95	213	36	20	14	kg 2,50	1 1/16 UNF
		Psi 6090	inch	1,46	3,70	5,94	2,46	3,74	8,39	1,42	0,79	0,55	lb 5,51	
GE2 TANDEM COMBINATION VALVES SA16	DN25	Mpa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	1 5/16 UNF
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES SAE20R	DN25	Mpa350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	1 5/8 UNF
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES SAE24R	DN25	Mpa 350	mm	37	102	167	66,5	112,4	213	50	25	14	kg 3,80	1 7/8 UNF
		Psi5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb 8,38	

TANDEM COMBINATION VALVES DIN 2353 HEAVY SERIES

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 TANDEM COMBINATION VALVES 8S	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	4	9	kg 0,98	M16x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,16	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 10S	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M18x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 12S	DN8	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	8	9	kg 0,98	M20x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,31	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 12S	DN10	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	10	9	kg 1,2	M20x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES 14S	DN10	MPa 500	mm	28,5	67,6	97,6	42,4	82,5	135	34	10	9	kg 1,2	M22x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,25	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES 16S	DN13	MPa 500	mm	28,5	67,6	97,6	42,4	89	135	34	13	9	kg 1,4	M24x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,50	5,31	1,34	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES 20S	DN13	MPa 500	mm	28,5	67,6	97,6	42,4	93	135	34	13	9	kg 1,4	M30x2
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,66	5,31	1,34	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES 25S	DN20	Mpa 420	mm	37	94	151	62,5	111	213	50	20	14	kg 2,50	M36X2
		Psi 6090	inch	1,46	3,70	5,94	2,46	4,37	8,39	1,97	0,79	0,55	lb 5,51	
GE2 TANDEM COMBINATION VALVES 30S	DN25	Mpa 350	mm	37	102	167	66,5	121	213	50	25	14	kg 3,80	M42X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,76	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES 38S	DN25	Mpa350	mm	37	102	167	66,5	131	213	50	25	14	kg 3,80	M52X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	5,16	8,39	1,97	0,98	0,55	lb 8,38	

TANDEM COMBINATION VALVES DIN 2353 LIGHT SERIES

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 TANDEM COMBINATION VALVES 6L	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M12X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 8L	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M14X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 10L	DN6	MPa 500	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M16X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 TANDEM COMBINATION VALVES 10L	DN10	MPa 500	mm	28,5	67,6	97,6	42,4	76,5	135	34	8	9	kg 1,2	M16X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,01	5,31	1,34	0,31	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES 12L	DN10	MPa 500	mm	28,5	67,6	97,6	42,4	79,5	135	34	10	9	kg 1,2	M18X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,13	5,31	1,34	0,39	0,35	lb 2,65	
GE2 TANDEM COMBINATION VALVES 15L	DN13	MPa 500	mm	28,5	67,6	97,6	42,4	87	135	34	13	9	kg 1,4	M22X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,43	5,31	1,34	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES 18L	DN13	MPa 500	mm	28,5	67,6	97,6	42,4	87	135	34	13	9	kg 1,4	M26X15
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,43	5,31	1,34	0,51	0,35	lb 3,09	
GE2 TANDEM COMBINATION VALVES 22L	DN20	Mpa 420	mm	37	94	151	62,5	110	213	50	20	14	kg 2,50	M30X2
		Psi 6090	inch	1,46	3,70	5,94	2,46	4,33	8,39	1,97	0,79	0,55	lb 5,51	
GE2 TANDEM COMBINATION VALVES 28L	DN25	Mpa 350	mm	37	102	167	66,5	117	213	50	25	14	kg 3,80	M36X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,61	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES 35L	DN25	Mpa350	mm	37	102	167	66,5	119	213	50	25	14	kg 3,80	M45X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,69	8,39	1,97	0,98	0,55	lb 8,38	
GE2 TANDEM COMBINATION VALVES 42L	DN25	Mpa350	mm	37	102	167	66,5	119	213	50	25	14	kg 3,80	M52X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,69	8,39	1,97	0,98	0,55	lb 8,38	

GE2 LEVER TANDEM DIN/ISO 228 BSP

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM	
GE2 LEVER TANDEM G1/4	DN6	MPa 50	mm	50	28,5	67,6	97,6	42,4	71	135	34	6	9	0,98	G1/4
		Psi 7250	inch	7250	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	2,16	
GE2 LEVER TANDEM G3/8	DN10	MPa 50	mm	50	28,5	67,6	97,6	44,4	73	135	34	10	9	1,2	G3/8
		Psi 7250	inch	7250	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	2,65	
GE2 LEVER TANDEM G1/2	DN13	MPa 50	mm	50	28,5	74,7	114	48,8	83	135	36	13	9	1,4	G1/2
		Psi 7250	inch	7250	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	3,09	
GE2 LEVER TANDEM G3/4	DN20	MPa 42	mm	42	37	94	151	62,5	95	213	50	20	14	2,5	G3/4
		Psi 6090	inch	6090	1,46	3,70	5,94	2,46	3,74	8,39	1,97	0,79	0,55	5,51	
GE2 LEVER TANDEM G1	DN25	MPa 42	mm	42	37	102	167	66,5	112,4	213	50	25	14	3,8	G1
		Psi 6090	inch	6090	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	8,38	
GE2 LEVER TANDEM G1 1/4 R	DN25	MPa 35	mm	35	37	102	167	66,5	112,4	213	50	25	14	3,8	G11/4
		Psi 5075	inch	5075	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	8,38	
GE2 LEVER TANDEM G1 1/2R	DN25	MPa 35	mm	35	37	102	167	66,5	112,4	213	50	25	14	3,8	G1 1/2
		Psi 5075	inch	5075	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	8,38	

GE2 LEVER TANDEM ANSI/ASME B1.20.1 NPT

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM	
GE2 LEVER TANDEM N1/4	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	71	135	34	6	9	kg	0,98	N1/4
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	lb	2,16	
GE2 LEVER TANDEM N3/8	DN10	MPa 50	mm	28,5	67,6	97,6	44,4	73	135	34	10	9	kg	1,2	N3/8
		Psi 7250	inch	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	lb	2,65	
GE2 LEVER TANDEM N1/2	DN13	MPa 50	mm	28,5	74,7	114	48,8	83	135	36	13	9	kg	1,40	N1/2
		Psi 7250	inch	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	lb	3,09	
GE2 LEVER TANDEM N3/4	DN20	MPa 42	mm	37	94	151	62,5	95	213	36	20	14	kg	2,50	N3/4
		Psi 6090	inch	1,46	3,70	5,94	2,46	3,74	8,39	1,42	0,79	0,55	lb	5,51	
GE2 LEVER TANDEM N1	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	N1
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	
GE2 LEVER TANDEM N1 1/4R	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	N1 1/4
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	
GE2 LEVER TANDEM N1 1/2R	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	N1 1/2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	

GE2 LEVER TANDEM SAE J1926-1

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT		ØM
GE2 LEVER TANDEM SAE4	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	71	135	34	6	9	kg	0,98	7/16
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,80	5,31	1,34	0,24	0,35	lb	2,16	UNF
GE2 LEVER TANDEM SAE6	DN10	MPa 50	mm	28,5	67,6	97,6	44,4	73	135	34	10	9	kg	1,2	9/16
		Psi 7250	inch	1,12	2,66	3,84	1,75	2,87	5,31	1,34	0,39	0,35	lb	2,65	UNF
GE2 LEVER TANDEM SAE8	DN13	MPa 50	mm	28,5	74,7	114	48,8	83	135	36	13	9	kg	1,4	3/4
		Psi 7250	inch	1,12	2,94	4,49	1,92	3,27	5,31	1,42	0,51	0,35	lb	3,09	UNF
GE2 LEVER TANDEM SAE12	DN20	MPa 42	mm	37	94	151	62,5	95	213	36	20	14	kg	2,50	1 1/16
		Psi 6090	inch	1,46	3,70	5,94	2,46	3,74	8,39	1,42	0,79	0,55	lb	5,51	UNF
GE2 LEVER TANDEM SA16	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	1 5/16
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	UNF
GE2 LEVER TANDEM SAE20R	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	1 5/8
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	UNF
GE2 LEVER TANDEM SAE24R	DN25	MPa 35	mm	37	102	167	66,5	112,4	213	50	25	14	kg	3,80	1 7/8
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,43	8,39	1,97	0,98	0,55	lb	8,38	UNF

GE2 LEVER TANDEM DIN 2353 HEAVY SERIES

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 LEVER TANDEM 8S	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	4	9	kg 0,98	M16x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,16	0,35	lb 2,16	
GE2 LEVER TANDEM 10S	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M18x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 LEVER TANDEM 12S	DN8	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	8	9	kg 0,98	M20x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,31	0,35	lb 2,16	
GE2 LEVER TANDEM 12S	DN10	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	10	9	kg 1,2	M20x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,39	0,35	lb 2,65	
GE2 LEVER TANDEM 14S	DN10	MPa 50	mm	28,5	67,6	97,6	42,4	82,5	135	34	10	9	kg 1,2	M22x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,25	5,31	1,34	0,39	0,35	lb 2,65	
GE2 LEVER TANDEM 16S	DN13	MPa 50	mm	28,5	67,6	97,6	42,4	89	135	34	13	9	kg 1,4	M24x1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,50	5,31	1,34	0,51	0,35	lb 3,09	
GE2 LEVER TANDEM 20S	DN13	MPa 50	mm	28,5	67,6	97,6	42,4	93	135	34	13	9	kg 1,4	M30x2
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,66	5,31	1,34	0,51	0,35	lb 3,09	
GE2 LEVER TANDEM 25S	DN20	Mpa 42	mm	37	94	151	62,5	111	213	50	20	14	kg 2,50	M36X2
		Psi 6090	inch	1,46	3,70	5,94	2,46	4,37	8,39	1,97	0,79	0,55	lb 5,51	
GE2 LEVER TANDEM 30S	DN25	Mpa 30	mm	37	102	167	66,5	121	213	50	25	14	kg 3,80	M42X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,76	8,39	1,97	0,98	0,55	lb 8,38	
GE2 LEVER TANDEM 38S	DN25	Mpa35	mm	37	102	167	66,5	131	213	50	25	14	kg 3,80	M52X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	5,16	8,39	1,97	0,98	0,55	lb 8,38	

GE2 LEVER TANDEM DIN 2353 LIGHT SERIES

TYPE / ITEM CODE	DN	PN		A	B	C	D	L	H	X	ØLW	SW1/SW2	WEIGHT	ØM
GE2 LEVER TANDEM 6L	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M12X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 LEVER TANDEM 8L	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M14X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 LEVER TANDEM 10L	DN6	MPa 50	mm	28,5	67,6	97,6	42,4	76	135	34	6	9	kg 0,98	M16X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	2,99	5,31	1,34	0,24	0,35	lb 2,16	
GE2 LEVER TANDEM 10L	DN10	MPa 50	mm	28,5	67,6	97,6	42,4	76,5	135	34	8	9	kg 1,2	M16X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,01	5,31	1,34	0,31	0,35	lb 2,65	
GE2 LEVER TANDEM 12L	DN10	MPa 50	mm	28,5	67,6	97,6	42,4	79,5	135	34	10	9	kg 1,2	M18X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,13	5,31	1,34	0,39	0,35	lb 2,65	
GE2 LEVER TANDEM 15L	DN13	MPa 50	mm	28,5	67,6	97,6	42,4	87	135	34	13	9	kg 1,4	M22X1,5
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,43	5,31	1,34	0,51	0,35	lb 3,09	
GE2 LEVER TANDEM 18L	DN13	MPa 50	mm	28,5	67,6	97,6	42,4	87	135	34	13	9	kg 1,4	M26X15
		Psi 7250	inch	1,12	2,66	3,84	1,67	3,43	5,31	1,34	0,51	0,35	lb 3,09	
GE2 LEVER TANDEM 22L	DN20	Mpa 42	mm	37	94	151	62,5	110	213	50	20	14	kg 2,50	M30X2
		Psi 6090	inch	1,46	3,70	5,94	2,46	4,33	8,39	1,97	0,79	0,55	lb 5,51	
GE2 LEVER TANDEM 28L	DN25	Mpa 35	mm	37	102	167	66,5	117	213	50	25	14	kg 3,80	M36X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,61	8,39	1,97	0,98	0,55	lb 8,38	
GE2 LEVER TANDEM 35L	DN25	Mpa35	mm	37	102	167	66,5	119	213	50	25	14	kg 3,80	M45X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,69	8,39	1,97	0,98	0,55	lb 8,38	
GE2 LEVER TANDEM 42L	DN25	Mpa35	mm	37	102	167	66,5	119	213	50	25	14	kg 3,80	M52X2
		Psi 5075	inch	1,46	4,02	6,57	2,62	4,69	8,39	1,97	0,98	0,55	lb 8,38	